


# NEWTONTECH POWER

## POWER PACK 20

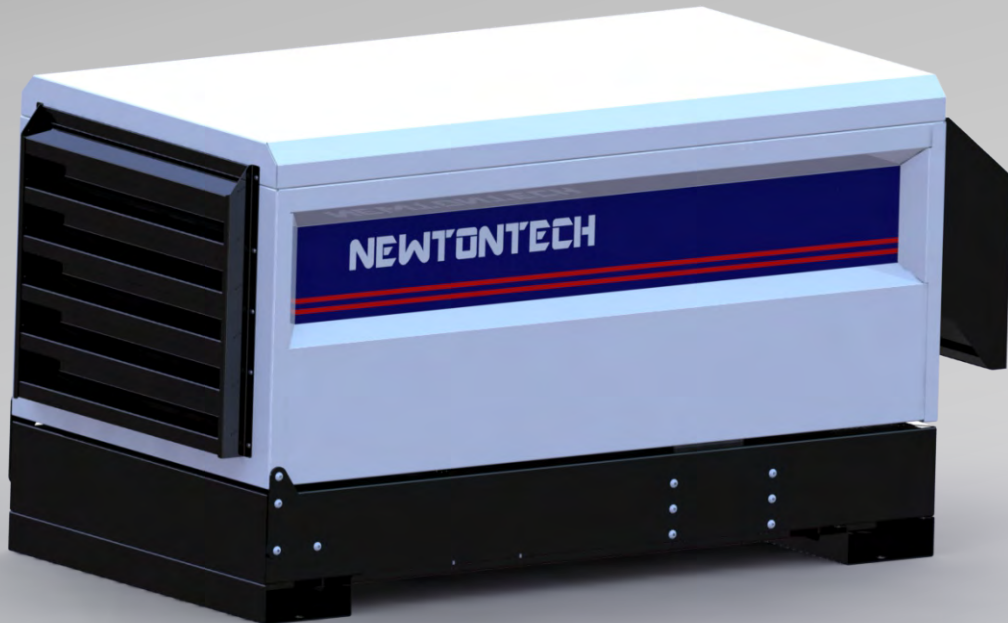

**We Build Power!**

- 1) Genuine Quality Components.**
- 2) Deep Sea AMF Controller.**
- 3) Large Integrated Stainless Steel Fuel Tank.**
- 4) Compact Design.**
- 5) 24 Months or 2000 Hours warrantee**
- 6) Support when you need it.**
- 7) Silent.**

[WWW.NEWTONTECHPOWER.CO.ZA](http://WWW.NEWTONTECHPOWER.CO.ZA)

602 MOOPLAATS  
PRETORIA

TEL +27 (0) 824432297  
FAX +27 (0) 866111090


[SALES@NEWTONTECHPOWER.CO.ZA](mailto:SALES@NEWTONTECHPOWER.CO.ZA)

ENGINE	DEUTZ	F3M 2011 F
ALTERNATOR	STAMFORD	PI144D1/PI144G1
ENGINE SPEED	1500	RPM
POWER 3PH	3PH 50HZ	20KVA
POWER 1PH	1PH 50HZ	20KVA
FUEL TANK	CAPACITY	70L

# NEWTONTECH POWER

## POWER PACK 20

ENGINE	DEUTZ	F3M 2011 F
ALTERNATOR	STAMFORD	PI144D1/PI144G1
ENGINE SPEED	1500	RPM
POWER	1 OR 3PH 50HZ	20 KVA

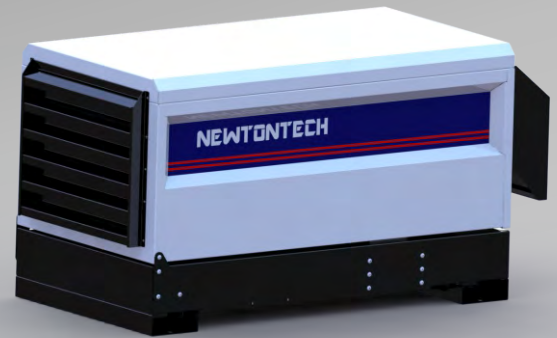

ENGINE	DEUTZ F3M 2011 F
FUEL	DIESEL
GOVERNER	MECHANICALLY GOVERNED
CYLINDERS	3
ASPIRATION	NORMAL
DISPLACEMENT	2.34 LITRES
COOLING SYSTEM	OIL COOLED
EMISSION	EU STAGE II
ENGINE POWER STANDBY	23.9 KW @ 1500RPM
ENGINE POWER PRIME	21.4 KW @ 1500 RPM

ALTERNATOR	STAMFORD PI144D1/PI144G1
BASELOAD POWER	20 KVA; 50HZ; 3 OR 1PH @ 40°C
CONTINUOUS POWER	20 KVA; 50HZ; 3 OR 1PH @ 40°C
STAND BY POWER	24 KVA; 50HZ; 3PH @ 40°C
VOLTS	AVR CONTROLLED
EXECUTION	BRUSHLESS
OVERLOAD (LONG TERM)	1 HOUR @ 24 KVA

FUEL CONSUMPTION	
50% OF PRIME POWER	3.2 L/PH
75% OF PRIME POWER	4.7 L/PH
PRIME POWER	6.7 L/PH

[WWW.NEWTONTECHPOWER.CO.ZA](http://WWW.NEWTONTECHPOWER.CO.ZA)

602 MOOPLAATS  
PRETORIA

TEL +27 (0) 824432297  
FAX +27 (0) 866111090

[SALES@NEWTONTECHPOWER.CO.ZA](mailto:SALES@NEWTONTECHPOWER.CO.ZA)